

# POWER VISION<sup>®</sup>

H.I.D DRIVING LIGHTS

QUATTRO ALLOY

## Quattro<sup>®</sup> ALLOY



Internal Ballast System -  
Making fitment simple



Gortex Membrane Breather



Chrome & Black Alloy Housings  
available



Knurled Aiming Knobs for easy  
adjustment.



Waterproof Deutsch Connectors -  
For perfect, hassle free  
connections



Split Pins in Knurled Aiming  
knobs - They can't be removed.  
Avoiding theft

# POWER VISION®

## FEATURES


## H.I.D DRIVING LIGHTS



Clear Polycarbonate Protective Covers - Avoid damage to you lamp.



Available in 170mm or 220mm Round & Rectangle



35W, 55W & 70W H.I.D Xenon Options Available



Stainless Steel Fixings - to secure your investment



Spread & Pencil Beam options available.



Quick Start Ballasts are also available

## BUILT TOUGH FOR AUSTRALIAN CONDITIONS



[sales@minetuff.com.au](mailto:sales@minetuff.com.au)



# POWER VISION®

## H.I.D DRIVING LIGHTS

## QUATTRO ALLOY 1700




**QUICK START OPTION** is also available

The Quattro Alloy 1700 H.I.D Xenon driving lights give exceptional light for their size. These lights are especially useful where space is an issue. The brilliant mounting system makes these lamps low profile enabling them to be fitted on those hard to fit bull bars.

Their die-cast alloy body and polycarbonate lens cover makes them extremely durable and perfect for use in harsh environments.

The Quattro Alloy 1700 is available in 35W, 55W & 70W H.I.D Xenon option. They come with the ballast mounted internally and feature plug and play waterproof connections.

All Quattro H.I.D Xenon lamps come with 1 complete wiring harness for every pair of lamps.

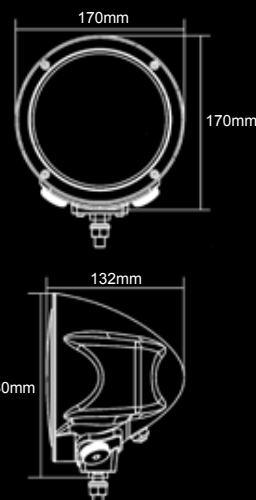

SPECIFICATIONS	35 Watt	55 Watt	70 Watt
Wattage	35 Watt	55 Watt	70 Watt
Light Source	H.I.D Xenon	H.I.D Xenon	H.I.D Xenon
Light Output	3400 Lumens	5225 Lumens	6770 Lumens
Voltage	9V-32V DC	9V-32V DC	9V-32V DC
Current Draw	3.75A @ 12V	4.53A @ 12V	5.35A @ 12V
Operating Temp.	-40°C to +85°C	-40°C to +80°C	-40°C to +80°C
Vibration	8.6G rms	8.6G rms	8.6G rms
IP Rating	IP65	IP65	IP65
Connector Type	Deutsch DT 2 Pin	Deutsch DT 2 Pin	Deutsch DT 2 Pin
Housing	Die-Cast Alloy	Die-Cast Alloy	Die-Cast Alloy
Lens Construction	Hardened Glass	Hardened Glass	Hardened Glass
Lens Cover	Clear Polycarb.	Clear Polycarb.	Clear Polycarb.
Bracket	Alloy Easy Adjust	Alloy Easy Adjust	Alloy Easy Adjust
Colour	6000K	6000K	6000K
Lifespan	± 3000 Hours	± 3000 Hours	± 3000 Hours
Diameter	170mm	170mm	170mm
Net Weight	2.25kg	2.25kg	2.25kg
Mounting Suitable	Upright & Pendent	Upright & Pendent	Upright & Pendent
Beams Available	Pencil & Spread	Pencil & Spread	Pencil & Spread
Warranty	2 Years	2 Years	2 Years
Harness Included	Yes*	Yes*	Yes*
PART NUMBER	35 Watt	55 Watt	70 Watt
Black - Pencil Beam	PVQ1700P	PVQ1700MP	PVQ1700M7P
Black - Spread Beam	PVQ1700S	PVQ1700MS	PVQ1700M7S
Chrome - Pencil Beam	PVQ1700PC	PVQ1700MPC	PVQ1700M7PC
Chrome - Spread Beam	PVQ1700SC	PVQ1700MSC	PVQ1700M7SC

\* Wiring Harness is only supplied with each pair (2) driving lights purchased



**100W Halogen Option is Available**

### 35W


#### PVQ1700 Spread Beam

Recorded with single lamp - distance in metres



#### PVQ1700 Pencil Beam


Recorded with single lamp - distance in metres

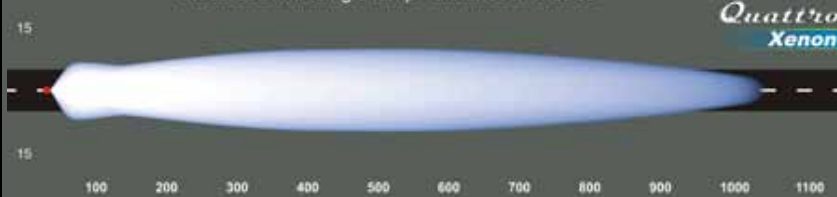

### 55W


#### PVQ1700 Spread Beam 55W

Recorded with single lamp - distance in metres

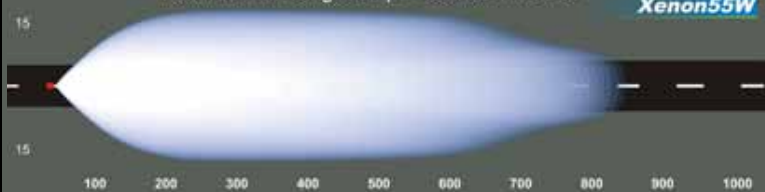

#### PVQ1700 Pencil Beam 55W


Recorded with single lamp - distance in metres

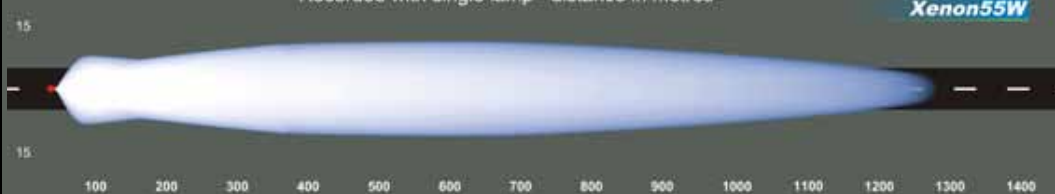

### 70W

#### PVQ1700 Spread Beam 70W

Recorded with single lamp - distance in metres

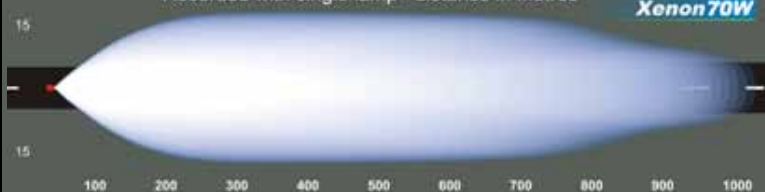

#### PVQ1700 Pencil Beam 70W

Recorded with single lamp - distance in metres

